


Bus secondary signal
unit
BNS 750-02

Page 1

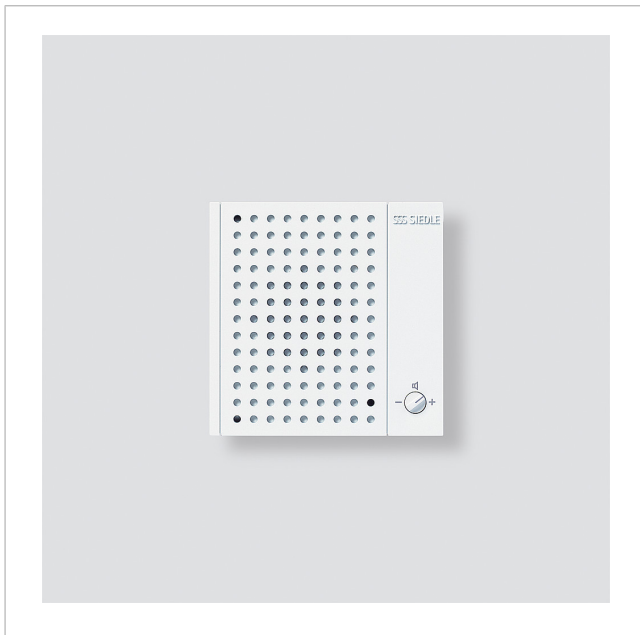

Product description


Bus secondary signal unit in a low-profile surface-mounted design with loudspeakers, externally adjustable volume control and electronic call generator, programmable in parallel with a bus indoor device.

Specifications

Operating voltage:	via In-Home bus
Ambient temperature:	+5 °C to +40 °C
Dimensions (mm) W x H x D:	107 x 107 x 25

Article information

Article designation	Article description	Colour/Material	KG SAP article no.
BNS 750-02	Bus secondary signal unit	White	A 200031519-00



Bus secondary signal
unit
BNS 750-02



Page 2


Spare parts

Article designation	Article description	Colour/Material	KGSAP article no.
TLM 611/612/645- TLE 051-02, TLE 061-0, BTLM 650-	Loudspeaker	Others	E 200029074-00

Bus secondary signal
unit
BNS 750-02

Page 3

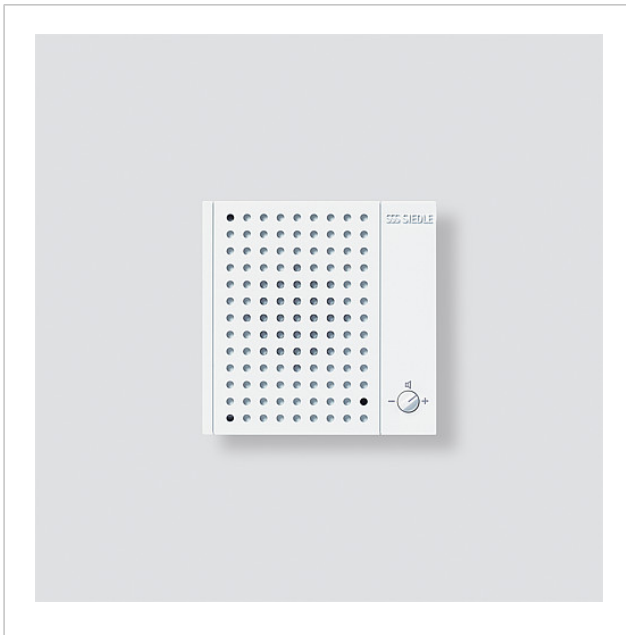



Bus secondary signal
unit
BNS 750-02

Page 4

BNS 750-02 Bus-auxiliary signalling unit

Product information

837 kB

[Download](#)

Declaration of Conformity

697 kB

[Download](#)

Additional information

109 kB

[Download](#)