

Product description

Bus switching unit for the top hat rail, with bi-stable relay.
For implementing various switching scenarios.

Actuation possible via BEM bus input module, the function buttons of the bus telephones (incl. door release button) or the light or call button of a door station.

Specifications



Contact type:	Changeover switch max. 30 V DC, 5 A
Switching time:	adjustable / switch on and off
Protection system:	IP 20
Ambient temperature:	0 °C to +40 °C
Horizontal pitch (HP):	1
Dimensions (mm) W x H x D:	18 x 90 x 60


Article information

Article designation	Article description	Colour/Material	KGSAP article no.
BSE 651-0	Bus switching unit top hat rail	Black	D 210007486-00

Bus switching unit top
hat rail
BSE 651-0

Page 2

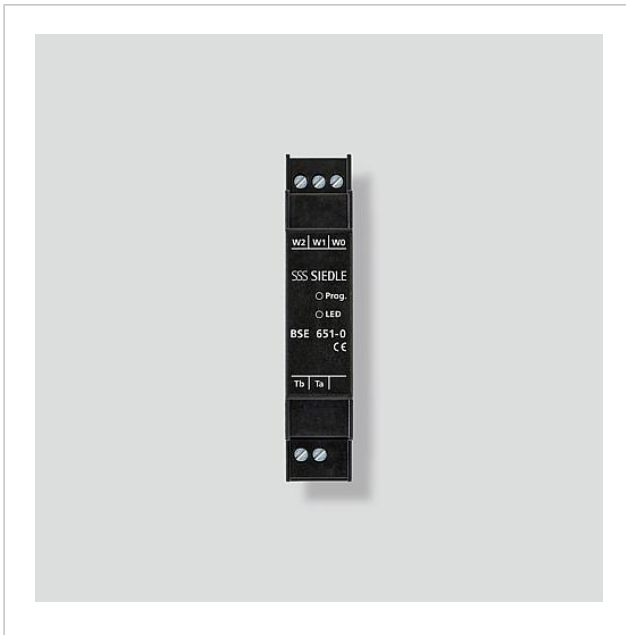



Bus switching unit top
hat rail
BSE 651-0

Page 3

BSE 650-02, BSE 651-0 Bus switching unit

Product information

385 kB

[Download](#)

BSE 651-0 Bus switching unit top hat rail

Declaration of Conformity

1,1 MB

[Download](#)

Additional information

140 kB

[Download](#)